



Special offer:  
40% off on list price\*

## The MOBOTIX Basic Starter Kit: Your Key To Success!

### What is it?

The MOBOTIX Basic Starter Kit gives you the opportunity to experience the entire range of MOBOTIX camera models. Purchasing this special demo kit enables you to effectively demonstrate the latest MOBOTIX technology which includes:

- our revolutionary MxActivitySensor, the future of intelligent video motion detection,
- our new dual thermographic cameras,
- our new HD premium lenses with up to 100 times higher light sensitivity,
- our new gesture-controlled MxDisplay.

### How does it work?

With every camera model you order, you also have the opportunity to purchase **each** compatible accessory at the same demo discount once! Place an order with your local MOBOTIX distributors of choice and you will receive a unique discount of up to 40% on the list price (for detailed pricing, please contact your local distributor).

### Who can take advantage of this offer?

This special offer is available to registered MOBOTIX partners only. To register as a MOBOTIX partner please visit our website for more information.

### How to order?

Simply contact your local distributor of choice, quote the MOBOTIX Basic Starter Kit and order with the attached order form. Only fully completed order forms (including lens choice, customer info, etc.) will be processed. The according accessories can be ordered as usual but must be sent along with your Basic Starter Kit Order Form.

\*Manufacturer suggested discount (not valid for thermographic cameras)



# Order Form / MOBOTIX Basic Starter Kit



Security-Vision-Systems



**Order to local Authorized MOBOTIX Distributor:**

Distributor: ABP Technology  
 E-mail: sales@abptech.com  
 Phone: 972-831-1600 Fax No.: 972-831-1416

**MOBOTIX Partner details:**

Company: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 Country: \_\_\_\_\_  
 E-mail: \_\_\_\_\_  
 Phone: \_\_\_\_\_ Fax No.: \_\_\_\_\_

For new MOBOTIX partners and customers, MOBOTIX offers a **Basic Starter Kit**. When purchasing part or all of the MOBOTIX Starter Kit while this special offer lasts, you will receive a **unique discount of up to 40%** instead of your normal discount (for detailed pricing please contact your local Authorized MOBOTIX Distributor). With every camera model, you also have the possibility to purchase each compatible accessory at the same unique discount once! Accessories will need to be specified in detail on the purchase order to your Authorized MOBOTIX Distributor. **Orders should be placed through your local Authorized MOBOTIX Distributor of choice.**

Article No.	(Please complete the MOBOTIX part code)	I want to order:	Qty.	Accessories needed:**	
<b>MX-M15D-Thermal</b> (camera body, choose sensor modules below)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>35% off*</b>
<b>Thermal Sensor Module 1:</b> <input type="checkbox"/> L43 <input type="checkbox"/> L65 <input type="checkbox"/> L135		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>Optical Sensor Module 2:</b> ____ (see lens table page 5)		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-S15D Thermal</b> (camera body, choose sensor modules below)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>35% off*</b>
<b>Sensor cable</b> <input type="checkbox"/> 0.5 meter, <input type="checkbox"/> 1 meter or <input type="checkbox"/> 2 Meter		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>Thermal Sensor Module 1:</b> <input type="checkbox"/> L43 <input type="checkbox"/> L65 <input type="checkbox"/> L135		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>Sensor Module 2:</b> Thermal <input type="checkbox"/> L43 <input type="checkbox"/> L65 <input type="checkbox"/> L135 or <b>Optical:</b> ____ (see lens table page 5)		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-M15D-Sec</b> (camera body, choose sensor modules below)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>40% off*</b>
<b>Sensor Module 1:</b> ____ <b>Sensor Module 2:</b> ____ (see lens table page 5)		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-S15D-Sec</b> (camera body, choose sensor modules below)		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>Sensor cable</b> <input type="checkbox"/> 0.5 meter, <input type="checkbox"/> 1 meter or <input type="checkbox"/> 2 Meter		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>Sensor Module 1:</b> ____ <b>Sensor Module 2:</b> ____ (see lens table page 5)		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-D15D-Sec</b> (camera body, choose lens modules below)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>40% off*</b>
<b>Lens 1:</b> ____ <b>Lens 2:</b> ____ (see lens table page 5)		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-Q25M-Sec-</b> ____ (see lens table page 5)		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-M25M-Sec-</b> ____ (see lens table page 6)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>40% off*</b>
<b>MX-D25M-Sec-</b> ____ (see lens table page 6)		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-S15M-Sec-</b> ____ <input type="checkbox"/> D12 (Day) or <input type="checkbox"/> N12 (Night)		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-T25M-Sec</b> (CamCore) <input type="checkbox"/> white <input type="checkbox"/> silver <input type="checkbox"/> amber <input type="checkbox"/> dark grey <input type="checkbox"/> black		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>40% off*</b>
<b>MX-T25M-SK-</b> - - <input type="checkbox"/> white <input type="checkbox"/> silver <input type="checkbox"/> amber <input type="checkbox"/> dark grey <input type="checkbox"/> black		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-T25M-SK-Bell-</b> - - <input type="checkbox"/> white <input type="checkbox"/> silver <input type="checkbox"/> amber <input type="checkbox"/> dark grey <input type="checkbox"/> black		<input type="checkbox"/>	1	<input type="checkbox"/>	
<b>MX-Display1-EXT-BL</b> (Color: black)		<input type="checkbox"/>	1	<input type="checkbox"/>	<b>40% off*</b>
<b>MX-Overvoltage-Protection-Box-</b> <input type="checkbox"/> LSA or <input type="checkbox"/> RJ45		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-NPA-Box</b>		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-GPS-Box</b>		<input type="checkbox"/>	—	<input type="checkbox"/>	
<b>MX-232-IO-Box</b>		<input type="checkbox"/>	—	<input type="checkbox"/>	

\*\* Manufacturer suggested discount  
 \*\* When ordering accessories, please attach a separate list with the Basic Starter Kit Form

**Terms and Conditions:**

Cameras are for demonstration purposes only (Not for Resale). Delivery: Ex-works Charleston, SC, excl. any taxes. Number of kits dependent upon individual partner status. Delivery time for S15D-/M15D-Thermal: Approximately 6 to 12 weeks (depending on the number of cameras). **Orders of S15D-/M15D-Thermal CANNOT be canceled by the customers.** MOBOTIX thermal cameras contain a thermographic image sensor that can make infra-red radiation visible and that can create „thermal images“. For this reason, the regulations on page 5 of this document apply.

We hereby confirm that we accept the conditions stated above.

\_\_\_\_\_  
 Date Signature from MOBOTIX Partner Stamp from MOBOTIX Partner

# T25 Complete Kits 1-4 (Keypad)




Security-Vision-Systems

**MOBOTIX**

## T25 Complete Kit 1

For Ethernet connection.

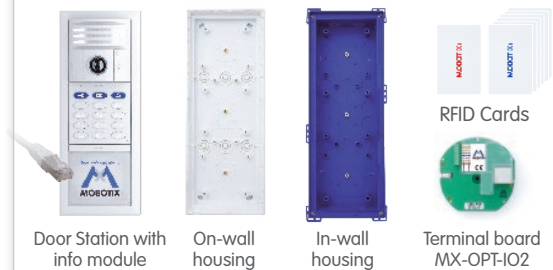

**Kit includes:**

- T25-CamCore camera module
- Keypad incl. 1 admin and 6 user cards
- Infomodul T25-Info
- Ethernet terminal board MX-OPT-IO2
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-1-PW**



## T25 Complete Kit 3

For Ethernet connection and tamper-proof electrical door opening.



**Kit includes:**


- T25-CamCore camera module
- Keypad incl. 1 admin and 6 user cards
- Infomodul T25-Info
- Ethernet terminal board MX-OPT-IO2
- MX-DoorMaster
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-3-PW**



## T25 Complete Kit 2

For two-wire connection and tamper-proof electrical door opening.

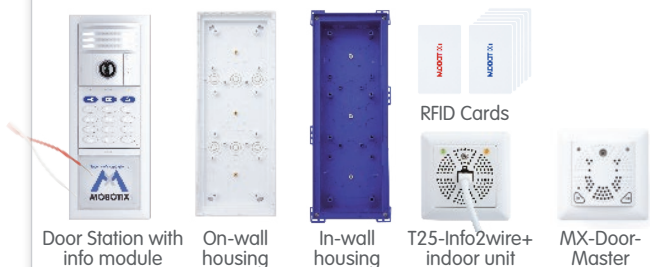

**Kit includes:**

- T25-CamCore camera module
- Keypad incl. 1 admin and 6 user cards
- T25-Info2wire+ info module with indoor unit
- MX-DoorMaster
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-2-PW**



## T25 Complete Kit 4

For two-wire connection.



**Kit includes:**

- T25-CamCore camera module
- Keypad incl. 1 admin and 6 user cards
- T25-Info2wire+ info module with indoor unit
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-4-PW**



**MOBOTIX**



# T25 Complete Kits 5-8 (BellRFID)



Security-Vision-Systems

**MOBOTIX**

## T25 Complete Kit 5

For Ethernet connection.




**Kit includes:**

- T25-CamCore camera module
- BellRFID F2 incl. 1 admin and 6 user cards
- Infomodul T25-Info
- Ethernet terminal board MX-OPT-IO2
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-Bell-1-PW**

## T25 Complete Kit 7

For Ethernet connection and tamper-proof electrical door opening.

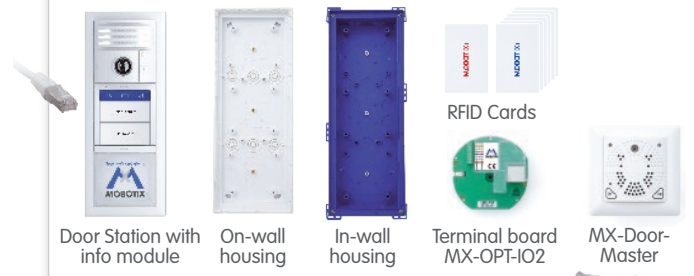

**Kit includes:**

- T25-CamCore camera module
- BellRFID F2 incl. 1 admin and 6 user cards
- Infomodul T25-Info
- Ethernet terminal board MX-OPT-IO2
- MX-DoorMaster
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-Bell-3-PW**

## T25 Complete Kit 6

For two-wire connection and tamper-proof electrical door opening.



**Kit includes:**

- T25-CamCore camera module
- BellRFID F2 incl. 1 admin and 6 user cards
- T25-Info2wire+ info module with indoor unit
- MX-DoorMaster
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-Bell-2-PW**

## T25 Complete Kit 8

For two-wire connection.



**Kit includes:**

- T25-CamCore camera module
- BellRFID F2 incl. 1 admin and 6 user cards
- T25-Info2wire+ info module with indoor unit
- Triple frame
- Triple in-wall housing
- Triple on-wall housing
- USB stick

**Article number: MX-T25M-SK-Bell-4-PW**



# Lens Details (f/2.0)

(for M15, D15, S15, T25, Q25)



Security-Vision-Systems



Article Number	L12	L25	L38	L51	L76	L160	L320
35mm equivalent	12 mm	25 mm	38 mm	51 mm	76 mm	160 mm	320 mm
Aperture (F)	2.0	2.0	2.0	2.0	2.0	2.5	2.5
Image angle horizontally	180°	82°	55°	40°	27°	13°	7°
Image angle vertically	160°	61°	41°	30°	20°	10°	5°
<b>Distance 1 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	endless	1.7	1.0	0.7	0.5	0.2	0.1
• Image height	11	1.2	0.7	0.5	0.4	0.2	0.1
<b>Distance 5 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	endless	8.7	5.2	3.6	2.4	1.1	0.6
• Image height	55	5.9	3.7	2.7	1.8	0.9	0.4
<b>Distance 10 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	endless	17.4	10.3	7.2	4.9	2.3	1.1
• Image height	110	11.9	7.5	5.4	3.6	1.7	0.9
<b>Distance 20 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	endless	34.7	20.6	14.5	9.7	4.6	2.3
• Image height	220	23.7	14.9	10.8	7.2	3.4	1.7
<b>Distance 50 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	k. A.	86.8	51.5	36.2	24.3	11.4	5.7
• Image height	k. A.	59.3	37.3	27.0	18.0	8.6	4.3

Available Lenses			L12 Day	L12 Night	L25 Day	L25 Night	L38 Day	L38 Night	L51 Day	L51 Night	L76 Day	L76 Night	L160 Day	L160 Night	L320 Day	L320 Night
MX-	M15D-	Sec-	D12	N12	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160	-	-
MX-	D15Di-	Sec-	-	-	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160	-	-
MX-	D15Di-	Sec-Pano	-	-	D25	N25	-	-	-	-	-	-	-	-	-	-
MX-	S15M-	Sec-	D12	N12	-	-	-	-	-	-	-	-	-	-	-	-
MX-	S15D-	Sec-	D12	N12	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160	-	-
MX-	M25M-	Sec-	D12	N12	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160	D320	N320
MX-	D25M-	Sec-	-	-	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160	-	-
MX-	T25M-	Sec-	D12	N12	-	-	-	-	-	-	-	-	-	-	-	-
MX-	Q25M-	Sec-	D12	N12	D25	N25	-	-	-	-	-	-	-	-	-	-

M15D-Thermal Recommended Combination of Sensors			
Thermal Image Sensor	Horizontal Image Angle	Optical Sensor Module	Horizontal Image Angle
L43	45°	L51	40°
L65	25°	L76	27°
L135	17°	L160	13°

**Attention – Special Export Regulations For Thermal Cameras Apply!**

Cameras with thermographic image sensors (“thermal cameras”) are subject to the special export regulations of the U.S.A. and the ITAR (International Traffic in Arms Regulation):

- According to the currently applicable export regulations of the U.S.A. and the ITAR, cameras with thermographic image sensors or parts thereof must not be exported to countries embargoed by the U.S.A. or the ITAR. At present, this applies to the following countries: Syria, Iran, Cuba, North Korea and Sudan. The same export ban applies to all persons and institutions listed in “Denied Persons List” (see [www.bis.doc.gov](http://www.bis.doc.gov), “Policy Guidance > Lists of Parties of Concern”).
- Under no circumstances can the camera itself or its thermographic image sensors be used in the design, the development or in the production of nuclear, biological or chemical weapons or in the weapons themselves.



# HD Premium Lens Details (f/1.8)

(for M25, D25)



Security-Vision-Systems

**MOBOTIX**

Original image						
Article Number	L23	L25	L38	L51	L76	L160
35mm equivalent	25 mm	25 mm	38 mm	51 mm	76 mm	160 mm
Aperture (F)	1.8	1.8	1.8	1.8	1.8	1.8
Image angle horizontally	92°	82°	55°	40°	27°	13°
Image angle vertically	68°	61°	41°	30°	20°	10°
<b>Distance 1 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	2,0	1,7	1,0	0,7	0,5	0,2
• Image height	1,3	1,2	0,7	0,5	0,4	0,2
<b>Distance 5 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	10,0	8,7	5,2	3,6	2,4	1,1
• Image height	6,7	5,9	3,7	2,7	1,8	0,9
<b>Distance 10 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	20,7	17,4	10,3	7,2	4,9	2,3
• Image height	13,5	11,9	7,5	5,4	3,6	1,7
<b>Distance 20 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	41,0	34,7	20,6	14,5	9,7	4,6
• Image height	27,0	23,7	14,9	10,8	7,2	3,4
<b>Distance 50 m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>	<b>m</b>
• Image width	103,0	86,8	51,5	36,2	24,3	11,4
• Image height	67,0	59,3	37,3	27,0	18,0	8,6

Available Lenses			L23 Day	L23 Night	L25 Day	L25 Night	L38 Day	L38 Night	L51 Day	L51 Night	L76 Day	L76 Night	L160 Day	L160 Night
MX-	M25M*-	Sec-	D23	N23	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160
MX-	D25M-	Sec-	D23	N23	D25	N25	D38	N38	D51	N51	D76	N76	D160	N160

\*The M25M camera model is still with L12 lenses (both day and night) available.