




# Cloud-managed Live Video Stream Decoder

## Stream live camera video feeds to TV 24/7

This is a powerful on-premise cloud-managed hardware interface. The decoder is designed so that owners of IPTECHVIEW SURVEILLANCE (Cloud VMS) can effortlessly see 24/7 live video streams of compatible cameras on any monitor or TV, without needing a PC.

Although IPTECHVIEW SURVEILLANCE is a cloud-based platform, this unit performs its day-to-day visualization as a local device with a local direct connection to the cameras. This reduces bandwidth consumption and provides viewers with high-quality and low-latency video streams.

The IPT-CAMView is a cloud-managed plug-and-play decoder appliance. The unit itself gets preconfigured and then can be adjusted and set up over IPTECHVIEW SYSTEM's remote management interface.

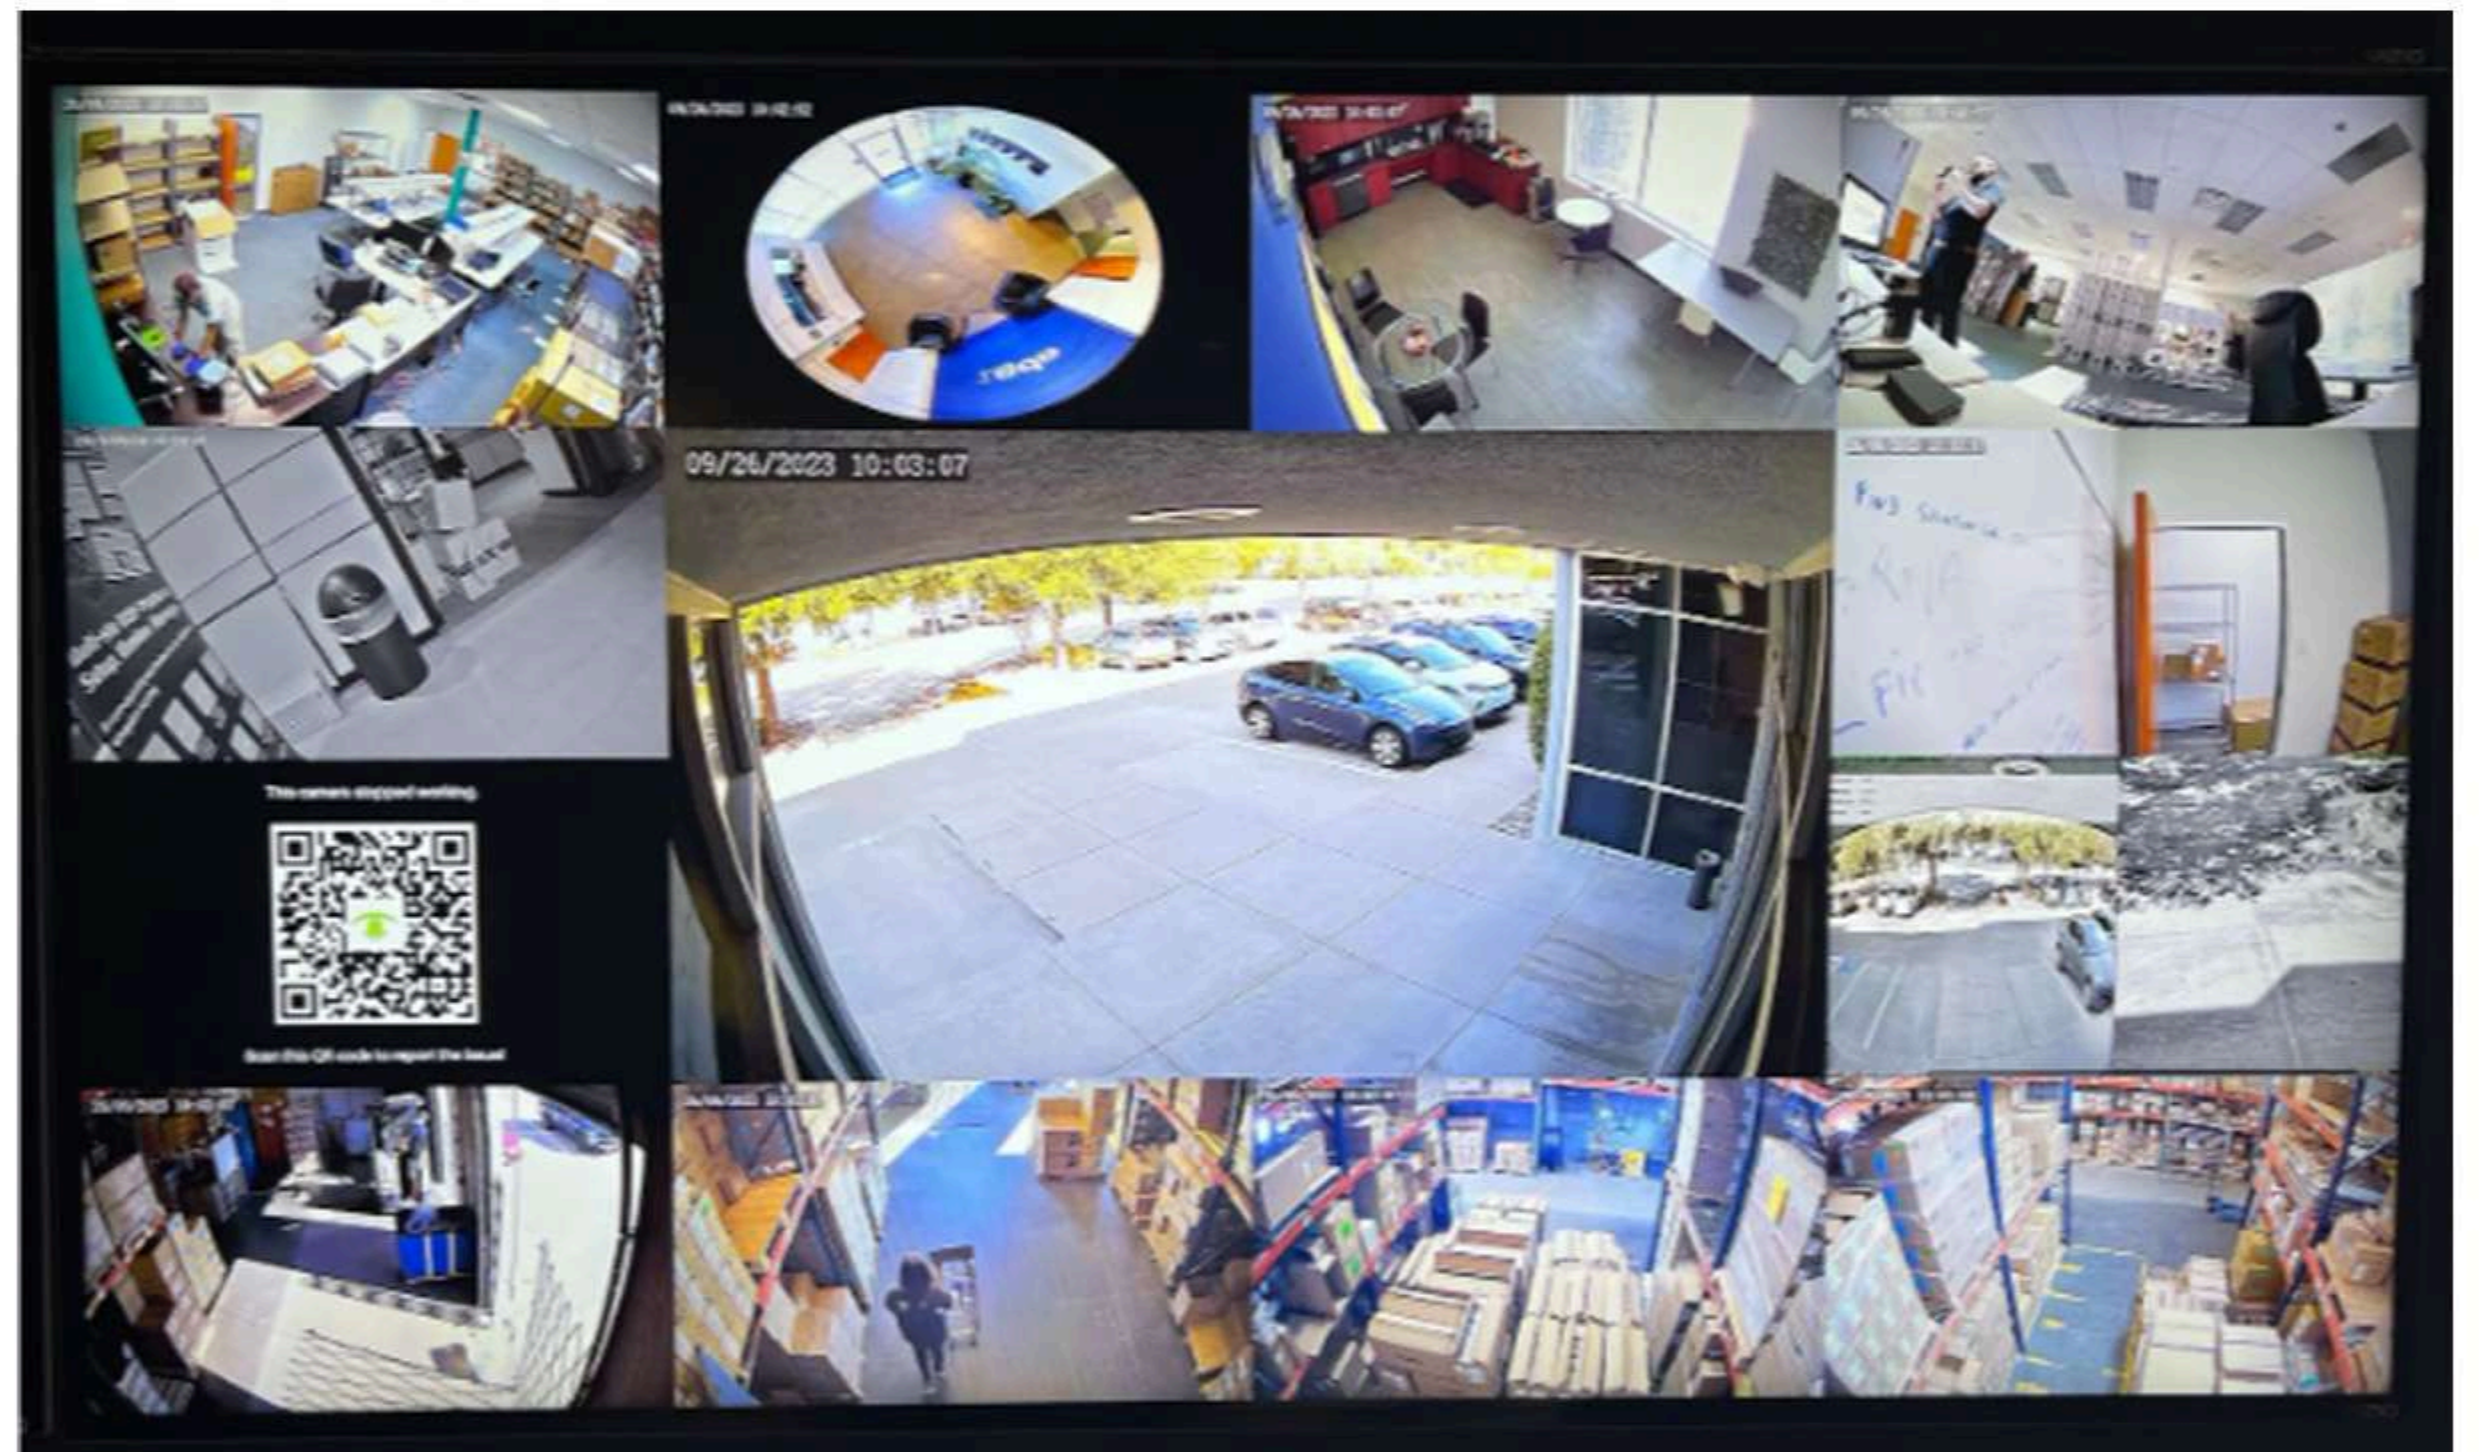

Admins can configure grid layouts remotely. The device will then operate like a local system, connect to the cameras, and show local video streams at up to 30 FPS for up to 8/16 simultaneous video feeds.

# SPECIFICATIONS

|                     | IPT-U1-CAMView-8                                                                                                                      | IPT-U1-CAMView-16                       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Decoding Capability | 8 Ch 1080P@30 fps                                                                                                                     | 16 Ch 720P@30 fps<br>14 Ch 1080P@30 fps |
| Decoding Format     | Ultra 265 H.265, H.264                                                                                                                |                                         |
| HDMI Output         | 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz |                                         |
| VGA Output          | 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz                        |                                         |
| Liveview Display    | 1/4/6/8/9                                                                                                                             | 1/4/6/8/9/16                            |
| Network Interface   | 1 RJ45 10 M/100 M self-adaptive Ethernet Interface                                                                                    |                                         |
| Power Supply        | DC 12 V/2 A                                                                                                                           |                                         |
| Dimensions          | 260mm × 222mm × 47mm (10.2"×8.7"×1.8")                                                                                                |                                         |

## Ordering Information:

Please use the following SKUs:

- IPT-U1-CAMView-8
- IPT-U1-CAMView-16

Explore the future with IPTECHVIEW™ - your partner in advanced solutions