


SURROUND
MEMBER WHI
AME FROM, BU
LOSE SIGHT OF
YOU ARE GO

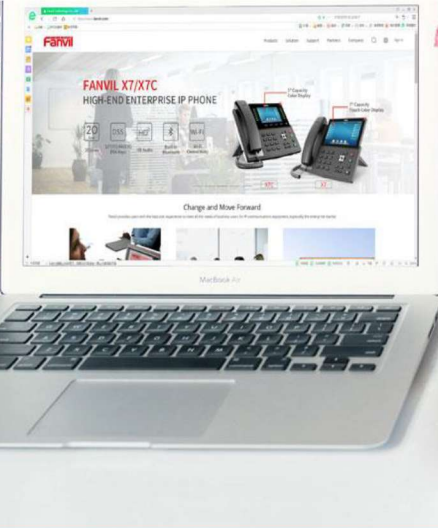

Fanvil

X3U Entry Level IP Phone

X3U is an entry-level color screen IP Phone. With all the necessary VoIP features and other extended features like EHS headset, it provides the high-quality and convenient experience for users at an affordable price.

Highlights

- ✓ 6 SIP lines, 3-way conference, SIP hotspot
- ✓ 3 Line keys on the main display
- ✓ 2.8" main color display
- ✓ HD audio on speakerphone and handset
- ✓ Opus voice: can handle a variety of audio applications.
- ✓ Support EHS wireless headset
- ✓ Dual Gigabit ports, integrated PoE
- ✓ Stand with 2 adjustable angles of 45 and 50 degrees



Model	Screen	Network	PoE	Power Adapter
X3U	2.8" color-screen	10/100/1000 Mbps	✓	Optional

Generic

- 6 SIP Lines
- HD Voice
- PoE Enabled
- 2.8-inch color screen
- Handset / Hands-free / Headset mode
- Desktop Stand / Wall-mounted (need an additional wall hanging parts)
- Optional External Power Supply

Phone Functions

- Local Phonebook (1000 entries)
- Remote Phonebook (XML/LDAP, 1000 entries)
- Call logs (In/Out/Missed, 600 entries)
- Black/White List Call Filter
- Screen Saver
- Voice Message Waiting Indication (VMWI)
- Programmable DSS/Soft keys
- Network Time Synchronization
- Support Poly wireless headset (Through Poly APD-80 EHS Cable)
- Support Jabra wireless headset (Through Fanvil EHS20 EHS Cable)
- Support Recording (Through Server)
- Action URL / Active URI
- uaCSTA

Call Functions

- Call out / Answer / Reject
- Mute / Unmute (Microphone)

- Call Hold / Call Resume / Call Change
- Call Waiting
- Intercom
- Caller ID Display
- Speed Dial
- Anonymous Call (Hide Caller ID)
- Call Forward (Always/Busy/No Answer)
- Call Transfer (Attended/Unattended)
- Call Parking/Pick-up (Depending on server)
- Redial
- Do-Not-Disturb
- Auto-Answering
- Voice Message / Music Hold (With server)
- 3-way Conference
- Hot Line
- Hot Desking
- Ring Tone Selection

Audio

- HD Voice Microphone/Speaker (Handset/Hands-free, 0 ~ 7KHz Frequency Response)
- HAC handset
- Wideband ADC/DAC 16KHz Sampling
- Narrowband Codec: G.711a/u, G.726-16K, G.726-24k, G.726-40k, G.726-32K, G.729A/B, iLBC, G.723.1(Optional)
- Wideband Codec: G.722, Opus
- Full-duplex hands-free speakerphone with AEC
- Voice Activity Detection (VAD) / Comfort Noise Generation (CNG)

Automatic Gain Control (AGC)

- Packet Loss Concealment (PLC)
- Dynamic Adaptive Jitter Buffer
- DTMF: In-band, Out-of-Band – DTMF-Relay (RFC2833) / SIP INFO

Network

- Physical: 10/100/1000 Mbps Ethernet, dual bridged port for PC bypass
- IP Mode: IPv4/IPv6/IPv4&IPv6
- IP Configuration: Static IP / DHCP / PPPoE
- Network Access Control: 802.1x
- VPN: L2TP / OpenVPN
- VLAN
- LLDP
- QoS
- RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)

Protocols

- SIP v1 (RFC2543), v2 (RFC3261) over UDP/TCP/TLS
- RTP/RTCP/SRTP
- STUN
- DHCP
- IPv6
- LLDP
- PPPoE
- 802.1x
- L2TP
- OpenVPN
- SNTP
- FTP/TFTP
- HTTP/HTTPS
- TR-069
- AES128 & AES256

Deployment & Management

- Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/SIP PNP/TR-069
- Web Management Portal
- Web-based Packet Dump
- Configuration Export / Import
- Phonebook Import/Export
- Firmware Upgrade

- Syslog
- AES encryption for configuration file

Physical Specifications

- Main LCD x1: 2.8-inch (320x240) Color Screen
- Keypad: 37 keys, including
 - 3 Line keys (With LED Indicator Light)
 - 4 Soft-keys
 - 9 Function keys (Hold/Transfer/Conference/Phonebook /CallLog/MWI/Headset/Status/Redial)
 - 4 Navigation keys
 - 1 OK key
 - 12 Standard Phone Digits keys
 - 3 Volume Control keys (Up/Down/Mute (Microphone))
 - 1 Hands-free key
- HD Handset (RJ9) x1
- Standard RJ9 Handset Wire x1
- 1.5M CAT5 Ethernet Cable x1
- Back Rack x1
- Status Indicator Light x1 (Red)
- RJ9 Port x2: Handset x1, Headset x1
- RJ45 Port x2: Network x1, PC x1 (Bridged to Network)
- Safety Keyhole x1
- External AC adapter (optional): AC 100~240V input and DC Power Input: 5V/0.6A
- Power Consumption: Idle 0.9~1.65W, Peak 1.8~2.95W
- Working Temperature: 0~45 °C
- Working Humidity: 10~95%
- Installation:
 - Desktop Stand
 - Wall-mounted (need an additional wall hanging parts)
- Color: Black
- Device Dimensions:
 - Desktop Stand (Angles 1): 169x186.3x174.5 mm
 - Desktop Stand (Angles 2): 169x177.6x183.7 mm
 - Wall-mounted: 169x115.6x212.5 mm
- Gift Box Dimensions: 274x215x68 mm
- Outer CTN Dimensions: 450x360x294 mm (10 PCS)
- N.W.: 9.39kg
- G.W.: 10.14kg

The above specifications may be updated in the future without prior notice. All hardware/software/physical features should be based on the final shipped products. For more information, please visit: www.fanvil.com

Compatibility List:



www.fanvil.com

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'An District, Shenzhen, China

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618 Email: sales@fanvil.com

